

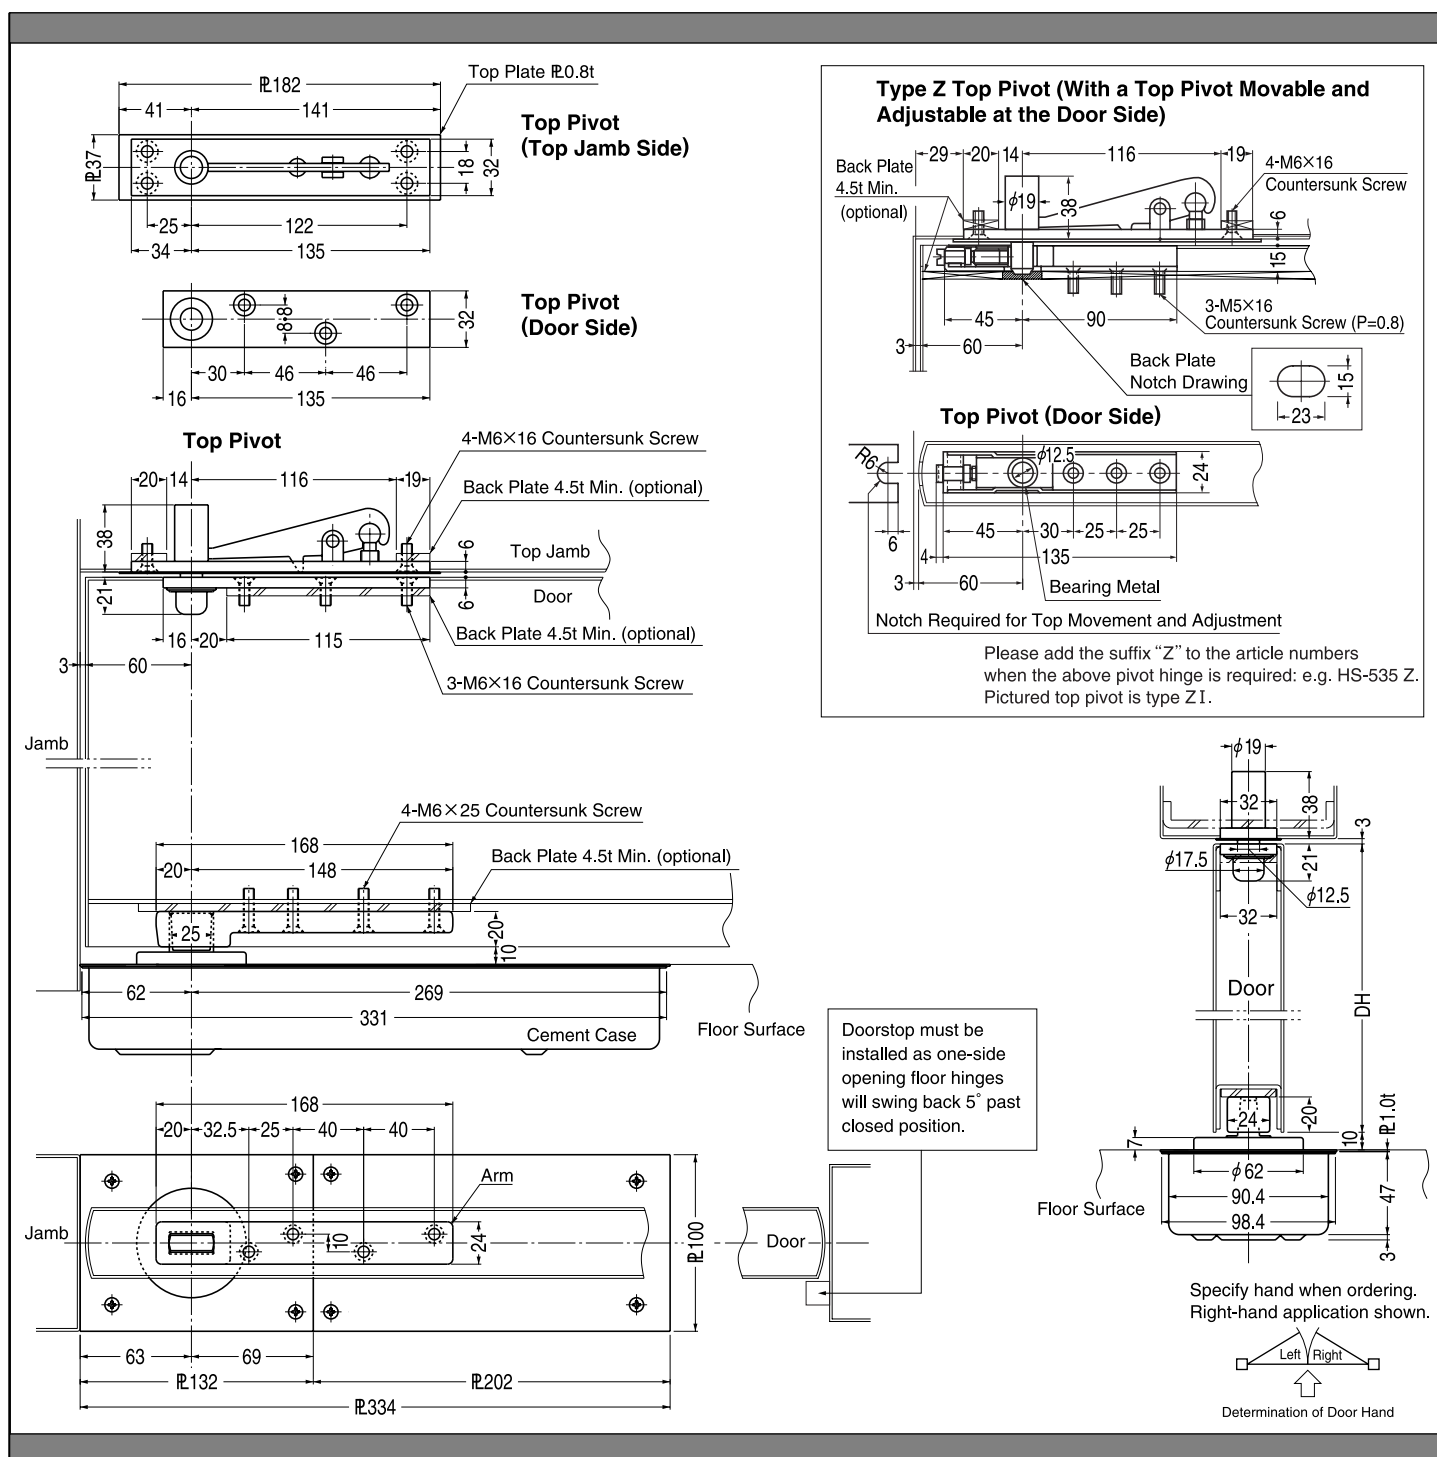


FLOOR HINGES FOR CENTER-HUNG

Model Number				Applicable Door Dimensions DW×DH mm	Maximum Door Weight kg
Double-action		Single-action			
Without Hold-open	With Hold-open	Without Hold-open	With Hold-open		
H-511	HS-511	H-515	HS-515	900 × 2100	70
H-522	HS-522	H-525	HS-525	950 × 2100	105
H-533	HS-533	H-535	HS-535	1050 × 2400	150
H-511 Z	HS-511 Z	H-515 Z	HS-515 Z	900 × 2100	70
H-522 Z	HS-522 Z	H-525 Z	HS-525 Z	950 × 2100	105
H-533 Z	HS-533 Z	H-535 Z	HS-535 Z	1050 × 2400	150

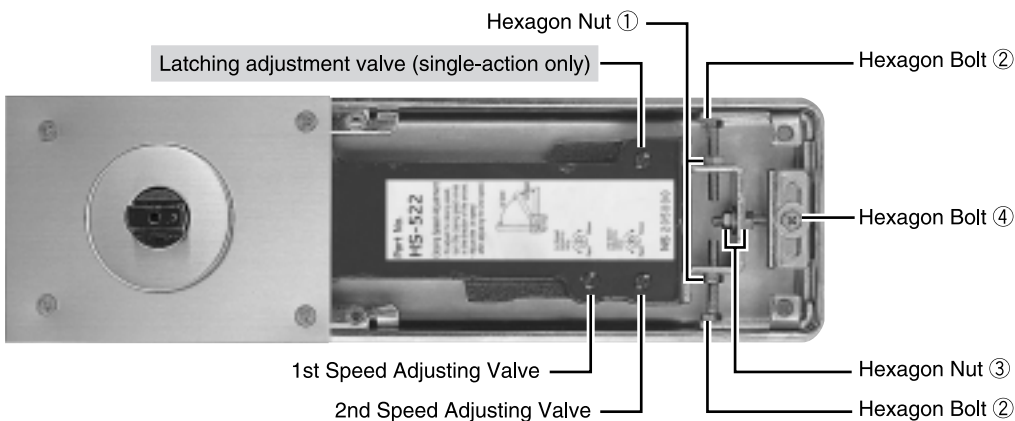

INSTALLATION:

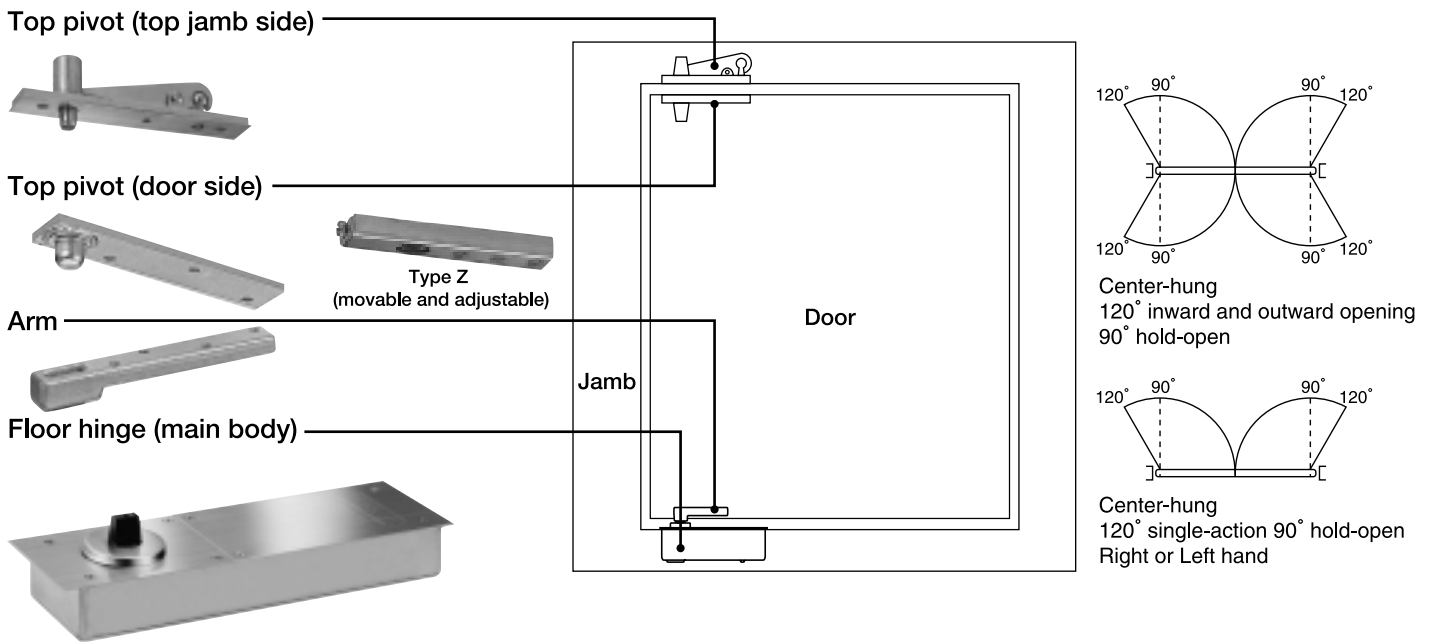


Note: Hexagon bolts and nuts have M5 threading.

Closing Speed Adjustment




Latching Adjustment



DOOR POSITIONING METHODS:

I Closed Position Alignment

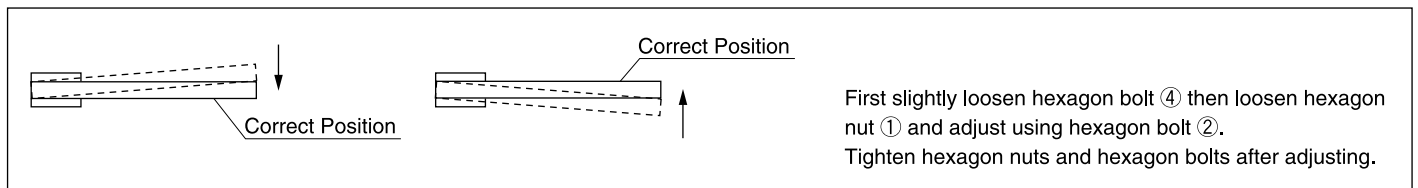

II Door/Jamb Gap (Parallel Alignment) Adjustment (Door Width Direction Adjustment)

